


Aluminum ROLLER BALL TIES

***Lighter-weight alternative
to stainless steel ties***

- Non-toxic, halogen-free & non-flammable
- Excellent chemical & UV resistance
- Uncoated temperature range: -112°F (-80°C) to 1000°F (538°C)
- Coated temperature range: -112°F (-80°C) to 302°F (150°C)
- Sharp edges and burrs are removed to protect installation and bundle
- Self-locking mechanism speeds installation, lowering overall installed cost
- Can't be detected by radar

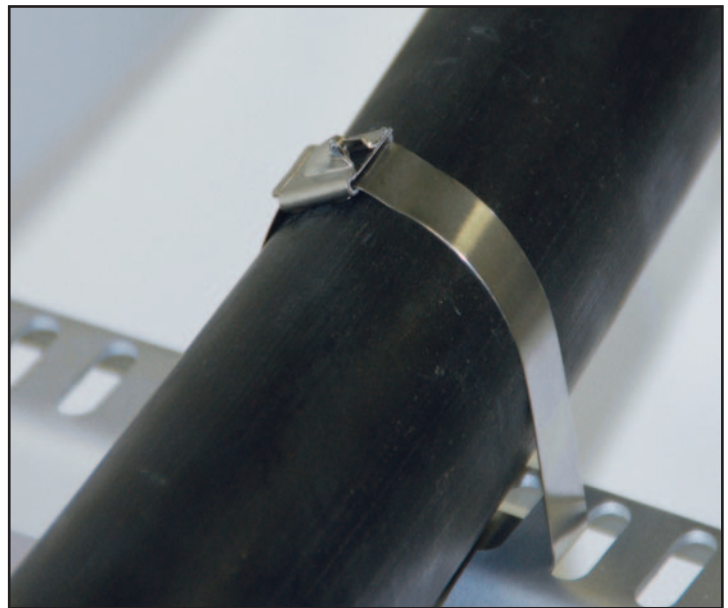

Roller Ball Ties • 50 Lb. • Aluminum

UNCOATED Part No.	COATED Part No.	LENGTH		WIDTH		THICKNESS		MAX BUNDLE DIAMETER		BAG Wt.		PACKAGING		
		In	mm	In	mm	In	mm	Min	Max	Kg	Lb	Ties Per Bag	Bags Per Box	Bag (LxWmm)
TBC150AL	TBC150ALC	6"	150	0.31	7.9	0.01	0.03	1.5	39	0.24	0.11	100	25	200X150
TBC200AL	TBC200ALC	8"	200	0.31	7.9	0.01	0.03	2	51	0.27	0.12	100	25	255X150
TBC360AL	TBC360ALC	14"	360	0.31	7.9	0.01	0.03	4	102	0.36	0.16	100	20	420X150
TBC520AL	TBC520ALC	20.5"	520	0.31	7.9	0.01	0.03	6	151	0.52	0.24	100	20	580X150

Hayata Application Tools: CT-3, CT-5, CT-7, BT2000, BT1400

Applications: Marine, Defense

Approval: ABS Type Approval



To Order: US Toll Free: 877-785-8437 • www.Hayata.com • sales@Hayata.com